




- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



12

30

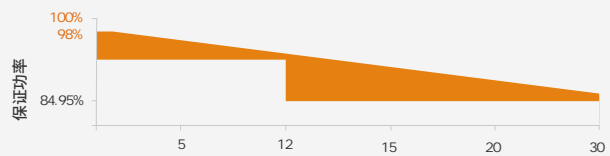

10BB

2%

0.45%



5%-25%



PID

PID  
85 /85% RH 192



	STC	NMOT	STC	NMOT	STC	NMOT
	395	294	400	298	405	302
	30.85	28.8	31.05	29.0	31.24	29.2
	12.81	10.23	12.89	10.30	12.97	10.36
	36.75	34.6	37.00	34.8	37.25	35.1
	13.69	11.04	13.78	11.11	13.86	11.17
	20.22		20.48		20.73	

	5%	10%	15%
	431	451	472
	31.43	31.43	31.43
	13.70	14.36	15.01
	37.50	37.50	37.50
	14.65	15.35	16.04

	10BB
	108 (6*18)
	1722*1134*30_ _ (67.80*44.65*1.18 )
	25.5] Y (56.22Te)
	2.0_ _
	2.0_ _
	IP68, 3
	4_ _ , (IEC), 12AI G(GL) 350_ _ (+), 250_ _ (-)
	F01/LJQ-3-CEK/MC4/MC4-EHO2

	1500H/DC
	-40, Cp+85, C
	30A
	C'See
	5400PS      2400PS
	70% <i>f</i> 5%

	36	36(GEA)
	936	720



75°C      50°C      25°C