



半片电池技术

显著降低热斑风险

更低度电成本

2%



优秀的抗PID性能

TUV
85 /85% RH 192

PID




体系及产品认证

- IEC 61215 / IEC 61730 / UL 1703
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



质量保证

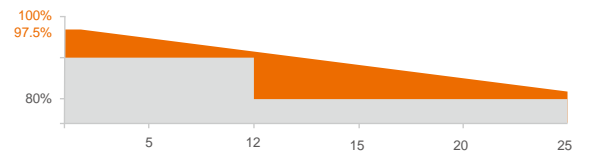

电性能参数

STC 0 ~ +3%

(Pmax/W)

(Vmpp/V)

(Impp/A)

(Voc/V)

(Isc/A)

m(%)

NMOT

(Pmax/W)

(Vmpp/V)

(Impp/A)

(Voc/V)

(Isc/A)

œ

S

°