



FEATHER

TP7F54M
TP7F54M(H) **108-cell**

390 - 410W

10BB PERC



体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系



质量保证

12

25

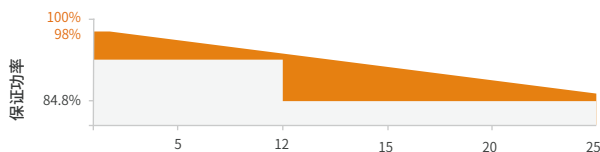

产品特性



重量更轻



10BB半片电池技术

2%

0.55%



显著降低热斑风险



优秀的抗PID性能

PID
85 / 85% RH 192





IP68接线盒

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	390	291	395	294	400	298	405	302	410	306
	30.65	28.6	30.85	28.8	31.05	29.0	31.24	29.2	31.43	29.3
	12.73	10.18	12.81	10.23	12.89	10.30	12.97	10.36	13.05	10.42
	36.50	34.4	36.75	34.6	37.00	34.8	37.25	35.1	37.50	35.3
	13.61	10.97	13.69	11.04	13.78	11.11	13.86	11.17	13.94	11.24
	20.00		20.20		20.50		20.70		21.00	

	10BB
	108 (6*18)
	1722*1134*30mm (67.80*44.65*1.18)
	16.2kg (35.72lbs.)
	2.0mm
	IP68, 3 Bypass Diodes
	4mm ² (IEC), 12AWG (UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class

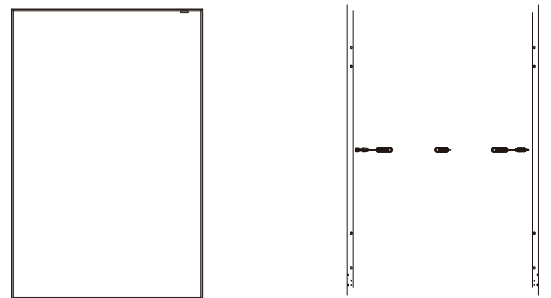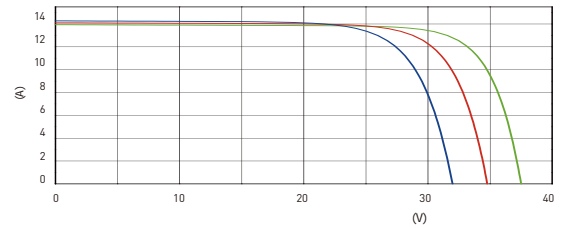

	36	36(USA)
	936	936

