



BISTAR

TP6L60M
TP6L60M(H) **120-cell**

350 - 370W

9BB Half-cut Mono Perc
Full Black



SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




PERFORMANCE WARRANTY

12 Years
Quality Assurance

25 Years
Power Output Guarantee

Linear Performance Warranty

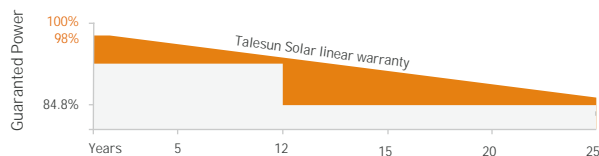

KEY FEATURES



9BB Half-cut Cell Technology

New circuit design, lower internal current, lower Rs loss
Ga doped wafer, attenuation <2% (1st year) / ≤0.55% (Linear)



Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



Wider Application

No water-permeability and high wear-resis
can be widely used in high-humid, windy ar



IP68 Junction Box

High waterproof level

ELECTRICAL CHARACTERISTICS

MECHANICAL

CHARACTERISTICS

I-V CURVE

Con (9Busbar)
20
m
.38 in
(2.99lbs)
Aluminum
Diode
WG(U
or
ized Length
W02

TP6L6

Voltage (V)

APPLICATIONS

Voltage (V)

TECHNICAL DRAWINGS

TECHNICAL

PACKAGING

TECHNICAL



ThL